


BURRIS WINDOWS

TECTVIEW
WACH

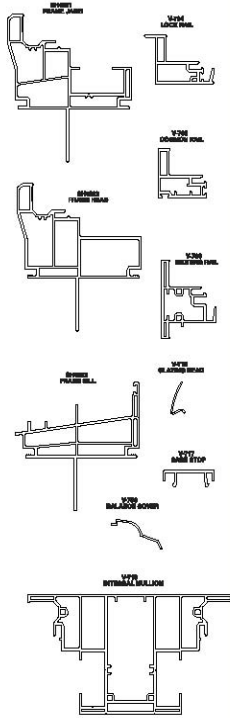

FEATURES & BENEFITS

- **Equal Glass**
- **Exterior bevel with sloped sill**
- **Sweep lock no keeper needed**
Passes forced entry test
- **¾ double strength glass standard**
- **Dual weatherstripping**
- **Front load coped glazing bead**
- **Long reach Interlock**
- **Double wall frame for less roll**
- **Full family of Single Hung, Single Slider, 3 lite Slider, Picture Windows and Geometric Shapes**
- **Custom built just for your project**



Dealer info here

MFG. LIMITATIONS

Width

Max 48"

Height

Max 84"

* Minimum width and heights are determined by process machinery capabilities.

BASELINE PERFORMANCE

Thermal Insulation

U-Factor SHG

LOE 270 0.29 0.27


Structural Performance

Air Infiltration@ 25MPH .14 cfm/ft²

Water Penetration 6.0 psf

Uniform Loads +/- 60.0 psf

Optional Profiles



ASSEMBLIES

